


Summary:

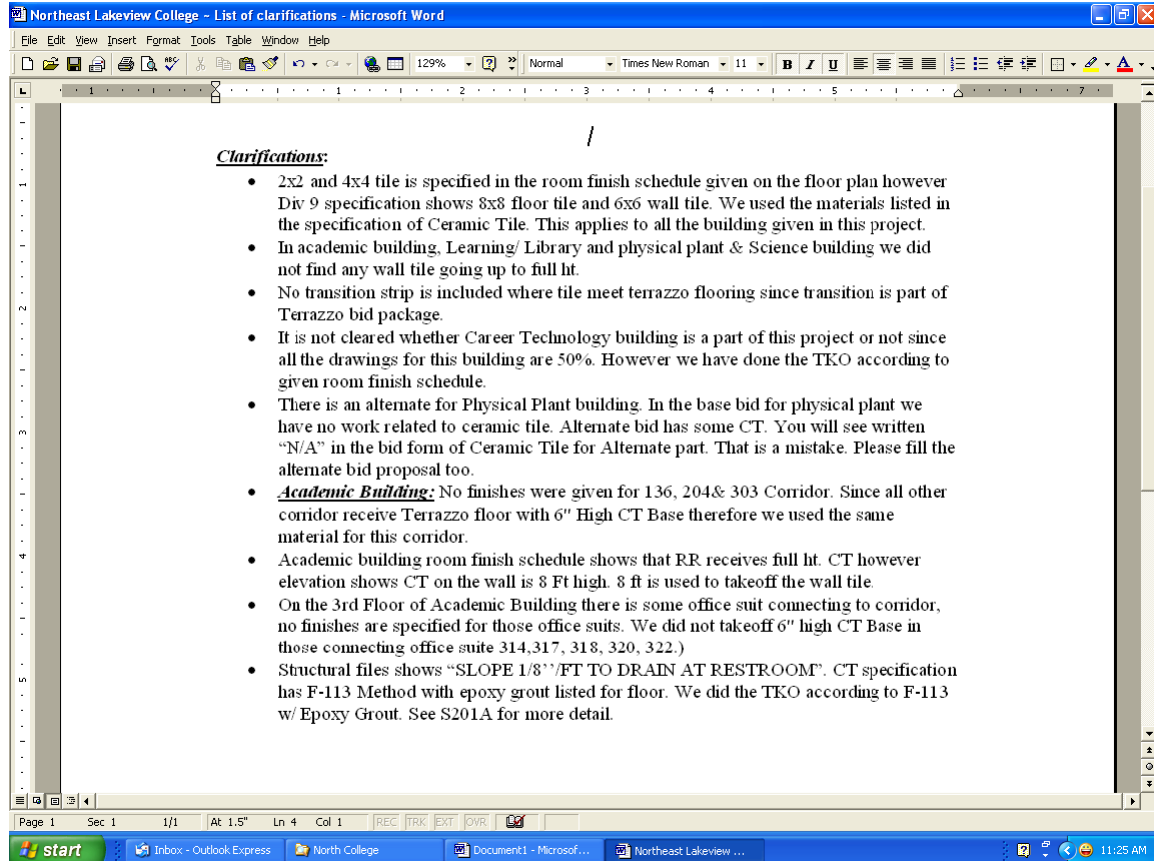

The image shows a screenshot of a Microsoft Word document. The title bar reads "Northeast Lakeview College - List of clarifications - Microsoft Word". The document content is as follows:

Clarifications:

- 2x2 and 4x4 tile is specified in the room finish schedule given on the floor plan however Div 9 specification shows 8x8 floor tile and 6x6 wall tile. We used the materials listed in the specification of Ceramic Tile. This applies to all the building given in this project.
- In academic building, Learning/ Library and physical plant & Science building we did not find any wall tile going up to full ht.
- No transition strip is included where tile meet terrazzo flooring since transition is part of Terrazzo bid package.
- It is not cleared whether Career Technology building is a part of this project or not since all the drawings for this building are 50%. However we have done the TKO according to given room finish schedule.
- There is an alternate for Physical Plant building. In the base bid for physical plant we have no work related to ceramic tile. Alternate bid has some CT. You will see written "N/A" in the bid form of Ceramic Tile for Alternate part. That is a mistake. Please fill the alternate bid proposal too.
- **Academic Building:** No finishes were given for 136, 204& 303 Corridor. Since all other corridor receive Terrazzo floor with 6" High CT Base therefore we used the same material for this corridor.
- Academic building room finish schedule shows that RR receives full ht. CT however elevation shows CT on the wall is 8 Ft high. 8 ft is used to takeoff the wall tile.
- On the 3rd Floor of Academic Building there is some office suit connecting to corridor, no finishes are specified for those office suits. We did not takeoff 6" high CT Base in those connecting office suite (314,317, 318, 320, 322.)
- Structural files shows "SLOPE 1/8"'/FT TO DRAIN AT RESTROOM". CT specification has F-113 Method with epoxy grout listed for floor. We did the TKO according to F-113 w/ Epoxy Grout. See S201A for more detail.

The screenshot also shows the Microsoft Word interface with the ribbon (File, Edit, View, Insert, Format, Tools, Table, Window, Help) and the Windows taskbar at the bottom with the Start button and several open applications.

Detailed Worksheet:

Microsoft Excel - Bluebonnet Trails Community MHMR Center

File Edit View Insert Format Tools Data Window Help

J16 = (G16*4)

Bluebonnet Trails Community MHMR Center pg# 1of 1															
Room	Name	Per	Floor		Base w/wall	Base w/ wall	IC	OC	Wall			Threshold	Caulk		
			F-4	F-5					BN		BN OC				
			12x12 Porc. Tile by Daltile	2x2 Unglazed Tile by Daltile	6" Porc. Base				12x12 OR 6x6	3X12 OR 6x6 Horiz.	3X12 OR 6x6 Vert.				
			F-113						SEE NOTES						
			W-243												
			LF	SF	SF	LF	LF	Ea	Ea	SF	LF	LF	Ea	Ea	LF
105	Vest	42	103	0	0	30	0	4	0	0	0	0	0	4	42
111	Men 4' AFF	42	106	0	0	36	4	0	144	36	0	0	1	58	
112	Women 4' AFF	42	106	0	0	36	4	0	144	36	0	0	1	58	
113	Shwr 4' AFF	66	0	115	0	57	8	4	228	57	21	6	2	98	
125	Men 4' AFF	53	155	0	0	50	4	0	200	50	0	0	1	69	
126	Women 4' AFF	53	154	0	0	50	4	0	200	50	0	0	1	69	
166	Vest	40	93	0	28	0	4	0	0	0	0	0	4	31	
167	Men 4' AFF	62	170	0	0	59	6	2	236	59	7	2	1	86	
169	Women 4' AFF	61	162	0	0	58	6	2	232	58	7	2	1	85	
16	Total	461	1049	115	58	346	44	8	1384	346	35	10	16	596	
12x12 Wall Tile					173 SF					95 SF of BN					
20	Gross	1384	SF												
21	Less Base	(-173)	SF												
22	Less BN	(-95)	SF												
23	Net Wall	1116	SF												
24	Clarifications:														
25	1. Rm# 115 Storage is not included.														
26	2. No price group or BN size is specified therefore 3x12 BN is used with 12x12 Porc. Tile on the wall.														
27	3. F-5 2x2 Unglazed tile was specified for any room in the room finish schedule however it is mention in the Finish Key. We used 2x2 tile on the Shower Floor.														
28	4. No Wall or floor tile is included in the shower stall since ROLL IN SHOWER (PRE- FAB) is shown on sheet A803 Note# 13.														
29	5. Wall Elevation shows 6x6 but 12x12 tile is used in the finish scheduled. Kenton Heinze with Braun Butler construction told us to provide alternate price for wall tile using 6x6.														

Ready NUM

start | Inboxes - Outlook Express | Plans | Document1 - Microsof... | Microsoft Excel - Blue... | 11:38 AM